





Specification

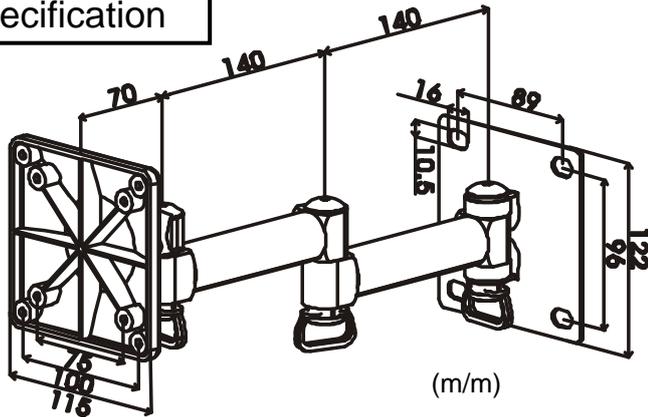

▲ Caution


- Mounting bracket VESA 3”(75mm x 75mm) and 4”(100mm x 100mm). For more information about the VESA standard please visit [www.vesa.org](http://www.vesa.org)
- As TFT manufacturers are constantly releasing new monitor models, we do not accept responsibility if the VESA mounting does not comply with the international standards.
- In order to attach the Arm to the rear of the TFT monitor, the monitor must be removed from its existing base ( if it is not already separate)–see the computer monitor manufacturer’s literature for details .The arm is designed for mounting TFT LCD FLAT DISPLAY only.
- The screws putting into hole of wall must be screwed tight.

Accessories

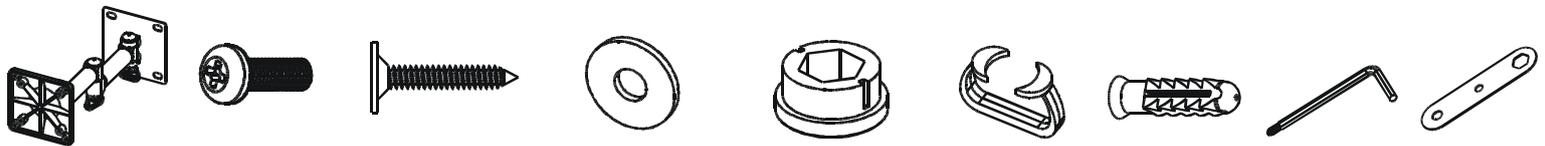


ARM	M4 SCREW x 4	WOOD SCREW x 4	WASHER x 4	PLASTIC CAP x 3	HOOK x 1	ANCHOR x 4	TOOL -1	TOOL -2
-----	--------------	----------------	------------	-----------------	----------	------------	---------	---------

Characteristics

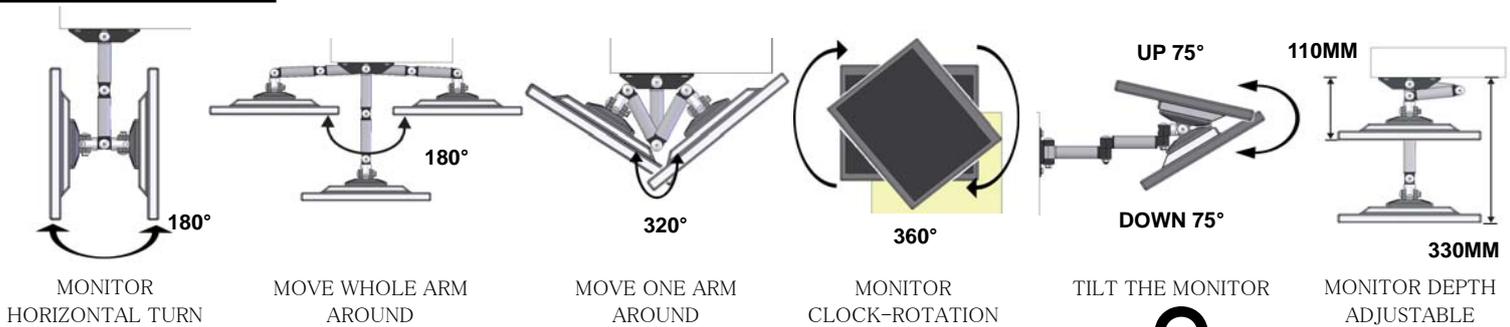


Installation


Follow installation steps carefully

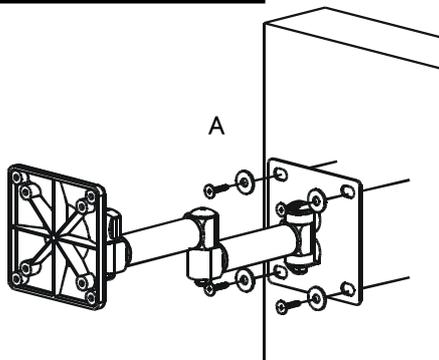

Step I .  
A: Put 4 WOOD SCREWS into each hole and screw tight on the position you prefer.\*

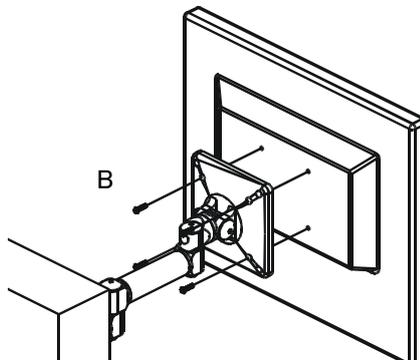

Step II .  
B: Screw the bracket with 4pcs of M4 SCREWS into the back of your monitor.

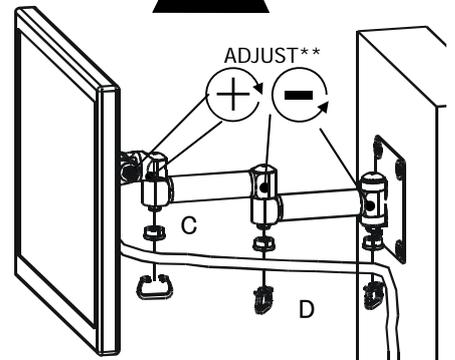

Step III:  
C: Press the PLASTIC CAP on the nut.  
D: Cable Management : Hitching the cord or wire by assembling PLASTIC CAP with HOOK.

\* The enclosed wood screws only apply to the mounting positions which are wooden material. If the material of mounting position is cement, please drill holes with Ø6mm & 25mm depth. Use a hammer to drive the Anchor into the holes on the wall, then fix the Plate on the wall by screwing the wood screws.\*

\*\* Using Tool-2 for the NUT and Tool-1 for INNER-HEXAGON SCREW at the same time to adjust the joints to the appropriate tightness you prefer. \*\*